

> em4

Accessories

Programmable touch panel MTP8/70

- > 7" TFT-LCD compact resistive touch panels, 65536 colors, LED backlight
- > Graphical resolution: 800 x 480 pixels
- > Wide viewing angle: 70° horizontally and vertically
- > Fan-less cooling system
- > Text, data, graphic, animation display
- > Processing of alarms and recipes
- > 400 MHz core logic, 64 MB RAM
- > 128 MB flash memory storage + SD card slot
- > Communication with one or up to 31 em4 with the Modbus interface ref. 88980120/121
- > Programmable with user-friendly EB software (compatible with Windows XP/Seven)
- > 2 RS232/RS485 serial ports, USB 1.1 port, USB 2.0 port, Ethernet port
- > Sound output



Programmable touch panel MTP8/70

Specific Characteristics

Designation	Size	Programming	Connection	Code
MTP8/70 user kit (MTP8/70, fixing brackets, MTP-em4 cable)	7"	USB-MiniUSB cable or Ethernet RJ45 crossover cable	Modbus RS232/RS485 serial ports, USB port, Ethernet port	88 970 696

Accessories

Description	Code
MTP6/50-MTP8/70 programming kit – USB-MiniUSB connection (EB/helpfile CD, USB-MiniUSB cable)	88 970 501
MTP8/50-MTP8/70 programming kit – Ethernet crossover connection (EB/helpfile CD, RJ45 crossover cable)	88 970 502
Modbus cable DB9 MTP8/70 ↔ RJ45 length 2 m to connect Modbus RS485 devices	88 970 504

General characteristics

Environmental characteristics

Certifications	UL, cUL
Conformity to standards	IEC 61000-4
Operating temperature	0 → +45 °C
Storage temperature	-20 → +60 °C
Relative humidity	10 → 90 % (operation)
Protection rating	IP65 - Dust and droplets Front panel seal watertight at standard
Vibration resistance	10 - 25 Hz, 2G 30 minutes in each of the X, Y, Z axes
Shock resistance	Free fall from 1 meter in each of the X, Y, Z axes

Electrical characteristics

Supply voltage	24 VDC Internal insulation via transformer
Voltage limits	19,2 → 28,8 VDC
Consumption	7,2 W max.

Mechanical characteristics

Dimensions (l x h x w)	200 x 146 x 42.5 mm Useful screen area: 154 x 93 mm
Panel cut-out	192 x 138 mm Panel thickness 1-10 mm
Mounting	Built-in, fixing by 2 screw clamps (supplied) for 1 to 10 mm panel
Connection	Removable 3-pin screw terminal block (supplied)
Weight	AC 850 g


Display characteristics

Description	TFT-LCD 7" polychrome, 65536 colors LED backlight Resolution 800 x 480 pixels 400 MHz core logic, 64 MB RAM 128 MB flash memory (programs and recipes backup) SD card memory slot Programmable with EB software Touch panel with user-definable layout Key life: 1 million operations minimum
Display details	Straight lines, free lines, squares, ovals, arcs, polygons, bitmaps, animations.gif, standard fonts
Functions	Buttons, switches, levers, LEDs, messages, data, password-secured buttons, triggers Bar charts, linear gauges, clocks, alphanumeric keyboards, graphics, recipes, alarm lists Text scrolling, multiple windows, data transfer, multiple language, archive
Connection	Programming: PC-MTP8/70 link via USB-MiniUSB cable (accessory) Communication: em4 -MTP8/70 link using a Modbus network via the communication cable (supplied)
Real-time clock	Uses em4 clock or built-in clock


Diagrams

Dimensions (mm)

MTP8/70

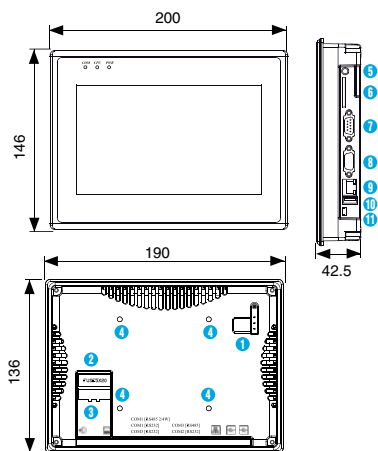

Panel cut-out



- 1 DIP SW & Reset button
- 2 Fuse
- 3 Power connector
- 4 VESA 75 mm screw holes
- 5 Audio
- 6 SD card slot
- 7 Com1 RS485, Com3 RS485, Com3 RS232
- 8 Com1 RS232, Com2 RS232
- 9 Ethernet port (RJ-45)
- 10 USB Host port
- 11 USB client port (programming)